




The
**Patent
Office**

PH 500000 10 5-4-01
U.S.A. *Priority Papers*
INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


W. Evans

Dated

17 AUG 2000

**CERTIFIED COPY OF
PRIORITY DOCUMENT**

THIS PAGE BLANK (USPTO)



The
Patent
Office

1/77

23FEB00 E515340-2 002879
P01/7700 0.00-0004123.6

Request for grant of a patent

(See notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

" B "

1. Your reference	PHGB 000018		
2. Patent application number (The Patent Office will fill in this part)	0004123.6		23 FEB 2000
3. Full name, address and postcode of the or of each applicant (<i>underline all surnames</i>)	KONINKLIJKE PHILIPS ELECTRONICS N.V. GROENEWOUDSEWEG 1 5621 BA EINDHOVEN THE NETHERLANDS Patents ADP Number (<i>if you know it</i>) If the applicant is a corporate body, give the country/state of its incorporation THE NETHERLANDS		
4. Title of the invention	COMMUNICATION SYSTEM AND A RECEIVER FOR USE IN THE SYSTEM		
5. Name of your agent (<i>if you have one</i>)	COLIN JAMES MOODY		
"Address for service" in the United Kingdom to which all correspondence should be sent (<i>including the postcode</i>)	Philips Corporate Intellectual Property Cross Oak Lane Redhill Surrey RH1 5HA Patents ADP number (<i>if you know it</i>)		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (<i>if you know it</i>) the or each application number	Country	Priority Application number	Date of filing
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day/month/year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer "Yes" if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document.

Continuation sheets of this form

Description	9x2
Claims(s)	3x2
Abstract	1x2
Drawings	4x2

10. If you are also filing any of the following, state how many against each item:

Priority Documents

Translations of priority documents

Statement of inventorship and right

to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and

search (*Patents Form 9/77*)

Request for substantive examination


(*Patents Form 10/77*)

Any other documents

(*Please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 22 February 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

01293 81 5278

C J MOODY

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered "Yes" Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DESCRIPTION

**COMMUNICATION SYSTEM AND A RECEIVER
FOR USE IN THE SYSTEM**

5

The present invention relates to a communication system and to a receiver for use in the system. The communication system has particular, but not exclusive, application to a short range wireless LAN for use in a domestic and office environment.

10

Short range wireless LANs based on protocols such as Bluetooth and HomeRF will typically operate in the 2.4 GHz ISM (Industrial, Scientific and Medical use) band which is also used for other applications such as RF heating. Problems which are present in such systems are frequency - selective multipath and co-channel interference. Such problems may affect the positioning of antennas which in a domestic environment the user will want them at aesthetically discrete locations.

15

A number of diversity and multiple mode radio communication systems have been proposed to combat multipath propagation channels. Recently the techniques to exploit multipath characteristics, instead of combating these characteristics, have been investigated using multiple transmitter antennas and sophisticated detection algorithms in the receiver. The techniques make use of antenna arrays with minimum distance of $\lambda/2$ between arrays. The techniques employ an individual modulator and demodulator for each branch, and transmit diversity performed by only one antenna array. Therefore there are hardware complexities and limitations to place transmit antenna. A multimode modulation technique is known which changes modulation scheme according to the varying propagation channel characteristics and this also will require a complex chain of hardware. The multimode techniques are applied in spread spectrum communications in which the separated quadrature related I-Q channels are spread with a predetermined PN code (the same pseudorandom sequence for each I-Q data stream), and experience a multi-

20

25

30

quadrature modulation. For high bit rate transmission, multi-code parallel spread spectrum system is disclosed in a US Patent 5,903,556, where the system uses phase shifted versions of the same pseudorandom sequences for each of several parallel I-Q data streams. This technique does not exploit
5 multipath effect. Known types of receivers for receiving multipath signals are based on Rake receivers in which the received signals are applied to several parallel branches. The first of the received signals is taken as a reference and adjustable time delays are introduced into the respective branches so that all the signals are substantially in-phase prior to their being combined. The
10 hardware required by a Rake receiver is relatively complex and expensive which makes it unsuitable for low cost applications.

An object of the present invention is to mitigate the frequency-selective multipath effects and co-channel interference in wireless LANs using relatively
15 inexpensive equipment.

According to one aspect of the present invention there is provided a receiver for receiving a dual code spread spectrum signal, comprising a plurality of diversity antennas, an adaptive forward equal gain combiner having a plurality of branches, each branch being coupled to a respective one
20 of said diversity antennas, means for splitting an output from the combiner into two output channels, means for demodulating the signals in the output channels, means for correlating the signals in each of the output channels with respective ones of the dual spreading codes and means for recovering data from the correlated signals.

25 According to a second aspect of the present invention there is provided a communication system comprising first and second transceivers, one of the first and second transceivers having a transmitting section for transmitting dual code spread spectrum signals, and the other of the first and second transceivers having a receiving section comprising antenna diversity means for
30 receiving the signals propagated by said one of the first and second stations, the antenna diversity means comprising a plurality of branches and means for co-phasing the signals in all but one of the branches with the signal in the one

of the branches, means for combining the co-phased signals, means for respectively correlating the combined signals with first and second PN spreading codes used for spreading data streams in said transmitting section and means for recovering data from the correlated signals.

5

The present invention will now be described, by way of example, with reference to the accompanying drawings, wherein:

Figure 1 is a block schematic diagram of a wireless LAN comprising a plurality of transceivers of which only 2 are shown,

10

Figure 2 is a block schematic diagram of a dual code spread spectrum transmitter using transmit vector diversity,

Figure 3 is a block schematic diagram of a dual code spread spectrum vector receiver with adaptive forward blind equal-gain combiner, and

15

Figure 4 is a block schematic diagram of a weighting controller suitable for use in the receiver shown in Figure 3.

In the drawings the same reference numerals have been used to indicate corresponding features.

20

The wireless LAN shown in Figure 1 comprises a wireless remote controller RC and at least two transceivers TR, TR' which may be stand alone transceivers coupled to respective input/output apparatus such as a TV set, Hi-Fi system, set top box or personal computer or integrated into such apparatus.

25

Since the transceivers TR, TR' are identical only the transceiver TR will be described in greater detail and the same reference numerals with a prime will be used to indicate the corresponding parts of the transceiver TR'.

30

A transmitter (Tx) 10 and a receiver (Rx) 12 are coupled to a processor 14 which controls the Tx10 and Rx12 as well as processing data relayed to or received from an input/output apparatus 16. The Tx10 is a dual code spread spectrum transmitter using transmit vector diversity in which each symmetrical constellation of signals is propagated by respective antennas 18, 20. A plurality of antennas ANT1 to ANTn, where n is an integer of 2 or more, are coupled to the Rx12 which has an architecture consisting of an adaptive

forward blind equal-gain combiner and dual-code spread spectrum receiver. Since the transceivers TR, TR' are static, their antennas 18, 20, ANT1 to ANTn can be located at any suitable positions.

5 The remote controller RC comprises a transmitter 22 and a receiver 24 which are coupled to and controlled by a processor 26. The transmitter 22 and receiver 24 may be of the same architecture as the Tx 10 and RX 12 but share the same antennas 28, 30. The remote controller RC further comprises a LCD display panel 32 with associated drivers (not shown) and a keypad 34 which constitutes a man/machine interface (MMI).

10 In operation a user with the remote control RC can operatively link the transceivers TR, TR' so that they can communicate with each other relaying data into and out of their respective input/output apparatus 16, 16'.

Referring to the transmitter 10 shown in Figure 2 data from the apparatus 16 is sent to the processor 14 in which it is encoded as a data stream having a predetermined number of levels depending on the modulation scheme, for example 2 levels for 16 QAM (Quadrature Amplitude Modulation) and supplied to a quadrature data splitter 40 which provides an I (or in-phase) channel data stream and a Q (or quadrature phase) channel data stream. The I, Q data streams are applied to first inputs of respective mixers 42, 44. A carrier signal f_c which may be either at an RF carrier frequency or at an IF carrier frequency is generated by a frequency generator 46. The carrier signal f_c is applied to a second input of the mixer 42 and, by way of a 90 degree phase shifter 48, to a second input of the mixer 44 to modulate respectively the I and Q data streams. The modulated I and Q data streams are applied to 25 respective multipliers 50, 52 to which different PN codes PN1, PN2, generated by a parallel PN code generator 54, are applied to produce respective spread spectrum signals. The multipliers 50, 52 are coupled to inputs of respective RF units 56, 58, the outputs of which are coupled respectively to the antennas 18, 20. If the carrier frequency f_c generated by the frequency generator 46 is at the RF carrier frequency then the RF units 56, 58 will be power amplifying stages. However if the carrier frequency f_c is at an IF, then the RF units 56, 58 will comprise a frequency up-conversion stage and a power amplifier. In the 30

latter case the RF units 56, 58 will have individual RF frequency signal sources thereby enabling the antennas 18, 20 to be located anywhere in the radio coverage area. The constellations of the signals propagated by the antennas 18, 20 are shown at diagrams A and B in Figure 2.

5 One effect of being relaxed over the location of the antennas 18, 20 is that in the worst case of anti-phase carrier transmission at the instant of transmitting, the two signals will undergo different phase and time delay due to different multipath reflections by different transmitter antenna locations. Accordingly an intelligent receiver capable of recognising the phase variation
10 needs to treat the initial phase difference as an effect of multipath and will need to adaptively correct for these phase differences.

Figure 3 illustrates the receiver 12 which includes an intelligent adaptive combiner 60 which is applies combining algorithms to adaptively correct the phase until a maximum signal power is obtained. The receiver 12 comprises a
15 plurality of the antennas ANT1 to ANTn which receive the transmitted signals $X_1(t)$ to $X_n(t)$, respectively, and apply them respective phase adjusting branches. As the architecture of each of the phase adjusting branch is substantially identical, only one of them will be described in detail and primed reference numerals will be used to identify the corresponding components in
20 the other branches.

Each of the branches comprises a low noise amplifier (LNA) 62 whose input is coupled to its antenna ANT1. The output of the LNA 62 is split into two paths. A first of the two paths is coupled to a first input of a direct conversion multiplier 64 whose second input is coupled to a first phase shifter 66 whose
25 input is obtained from the output a local oscillator 68 producing the rf carrier frequency which is common to all the branches. An output of the multiplier 64, which comprises a difference or error signal $\varepsilon_1(t)$, is filtered in a low pass filter 70 to remove unnecessary high order harmonics and its output is applied to a weighting controller 72 which controls the first phase shifter 66. A second of
30 the two paths is coupled to a second phase shifter 74 which is controlled by the weighting controller 72. The outputs of the second phase shifters 74, 74' are combined in a summing stage 76.

For convenience, the operation of the adaptive combiner will be described before describing the remainder of the receiver.

The signals $X_1(t)$ to $X_N(t)$ received by the respective antennas ANT1 to ANTn are amplified in the respective LNAs 62, 62' and mixed down to baseband in the multipliers 64, 64'. The phase of the local oscillator signal applied to each of the mixers 64, 64' is adjusted by the first phase shifter 66, 66' in response to a respective weighting signal $W_1(t)$, $W_N(t)$ supplied by the weighting controller 72, 72'. It will be recalled that the weighting signal on each branch will be different as the phases of the incoming received signals are varying according to their path directions. The weighting signal $W_1(t)$, $W_N(t)$ when finally determined, as will be described below, acts as information to trace the real decision weighting factors $D_1(t)$, $D_N(t)$ supplied to the second phase shifters 74, 74' by the respective weighting controllers 72, 72'. The values of the real decision weighting factors $D_1(t)$, $D_N(t)$ are determined to enable the incoming received signals on each branch to be co-phased with each other. The summed signal from the N branches appearing at the output of the summing stage 76 demonstrates an increased signal power.

The weighting controllers 72, 72' determine the values of the weighting signals $W_1(t)$, $W_N(t)$ and the real decision weighting factors $D_1(t)$, $D_N(t)$ without the need for a prior known reference signal. Referring to Figure 4 which shows an embodiment of a weighting controller 72. The weighting controller 72 may be adapted as shown to act as a centralised weighting controller which replaces the weighting controller in each of the branches. The error voltages $\epsilon_1(t)$ to $\epsilon_N(t)$ are applied in parallel to a level detector 78, the outputs of which are applied to an analogue to digital converter (ADC) 80 which in turn is coupled to a controller 82. A first look-up table 84 storing accurate measurements of phase shifts which are used to provide values of the weighting signals $W_N(t)$ and a second look-up table 86 storing values of the real decision weighting factors $D_N(t)$ obtained by comparing the phase deviations between the received signals on the respective branches are coupled to the controller 82. The controller 82 supplies these weighting signals and weighting factors to a digital-to-analogue converter (DAC) 88

which applies the respective weighting signals $W_1(t)$ to $W_N(t)$ and the respective weighting factors $D_1(t)$ to $D_N(t)$ to the respective first and second phase shifters 66, 66' and 74, 74'.

5 The procedure to find both the weighting signals $W_1(t)$ to $W_N(t)$ and the weighting factors $D_1(t)$ to $D_N(t)$ is as follows:

(1) Using statistical propagation data, the weighting signals $W_1(t)$ to $W_N(t)$ for controlling the first phase shifters 66, 66' will be initialised with continuous step voltage from 0° to 180° phase difference on each branch. In the case of $N=4$, the initial phase shift on branch 1 is 45° , branch 2 is 90° ,
10 branch 3 is 135° and branch 4 is 180° .

(2) The weighting controller 72 (or controllers if there is one in each branch) changes (or changes) the value of the weighting signal until the respective multipliers 64 to 64' generates a minimum error voltage, $\epsilon_N(t)_{\min}$. This minimum error voltage will be detected when the respective phase shifted
15 local oscillator frequency is co-phased with the received peak signal in that branch.

(3) When $\epsilon_N(t)_{\min}$ is obtained for a respective branch, its value is digitised in the ADC 80 and applied to the controller 82 which applies an corresponding input to the first look-up table 84 in order to determine the
20 phase deviation of the incoming received signal from the local oscillator frequency. A digital value read-out from the first look-up table 84 is applied by way of the controller 82 to the DAC 88 which provides the analogue weighting signal $W_N(t)$.

(4) Among the N incoming received signals, only one received signal
25 will have the lowest minimum phase deviation with respect to the local oscillator frequency and is selected as a reference signal.

(5) This reference signal is applied to the second look-up table 86 which produces a corresponding output which is used by the controller to generate the real weighting factor $D_N(t)$. This real weighting factor $D_N(t)$ is
30 applied to the second phase shifters 74, 74' as a phase control voltage which co-phases their respective received carrier signals to the selected reference signal.

As a result the signals combined in the summing stage 76 are co-phased.

Referring to Figure 3, the output of the summing stage 76 is amplified in an amplifier 90. An in-phase splitter 92 is coupled to an output of the amplifier 90 and provides outputs to first inputs of mixers 94, 96, respectively. A local oscillator 98 is applied to second inputs of the mixers 94, 96. Outputs of the mixers 94, 96 are coupled to respective low pass filters 100, 102, the outputs of which are coupled to first inputs of first and second correlators 104, 106.

A parallel PN code generator 108 applies the code PN1 to the second input of the correlator 104 and the code PN2 to the second input of the correlator 106. The outputs of the correlators 104, 106 correspond to the I-and Q-channel data streams which are of a complementary signal format as indicated by the constellation diagrams C and D and these data streams are compared in an error detection stage 110 to derive the recovered data stream on terminal 112.

In the present specification and claims the word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. Further, the word "comprising" does not exclude the presence of other elements or steps than those listed.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design, manufacture and use of the communication system and component parts therefor and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or any novel combination of features disclosed herein either explicitly or implicitly or any generalisation thereof, whether or not it relates to the same invention as presently claimed in any claim and whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features and/or combinations of

such features during the prosecution of the present application or of any further application derived therefrom.

CLAIMS

1. A receiver for receiving a dual code spread spectrum signal, comprising a plurality of diversity antennas, an adaptive forward equal gain combiner having a plurality of branches, each branch being coupled to a
5 respective one of said diversity antennas, means for splitting an output from the combiner into two output channels, means for demodulating the signals in the output channels, means for correlating the signals in each of the output channels with respective ones of the dual spreading codes and means for
10 recovering data from the correlated signals.

2. A receiver as claimed in claim 1, characterised in that said combiner comprises means for selecting a signal in one of said branches as a reference signal and means for co-phasing the signals in the remaining
15 branches with said reference signal.

3. A receiver as claimed in claim 1, characterised in that each of said branches comprises frequency down conversion and phase compensating means, in that a local oscillator is coupled to each of said
20 compensating means, in that each of said compensating means comprises means for adjusting the phase of the local oscillator to minimise the phase difference between the adjusted phase of the local oscillator frequency and the phase of the signal received by the respective branch and means for selecting the branch having a minimum phase deviation with respect to the local
25 oscillator frequency and treating that signal as the reference signal.

4. A receiver as claimed in claim 2, characterised in that each branch comprises a multiplier having a first input for a signal from its antenna and a second input for a phase adjusted local oscillator signal and an output
30 for a difference signal, a filter for removing high order harmonics from the difference signal, a weighting controller having means for producing a weighting signal which is applied to a first phase shifter for adjusting the phase

of the local oscillator signal and a weighting factor related to the selected reference signal, a second phase shifter having an input for a signal derived from the antenna, said second phase shifter having an input for the weighting factor whereby the input signal is co-phased with the selected reference signal, and a signal combiner for combining the selected reference and co-phased signals from the respective branches.

5 5. A receiver as claimed in claim 4, characterised in that the weighting controller is common to said branches.

10

6. A receiver as claimed in claim 5, characterised in that the weighting controller comprises a controller for receiving digitised filtered outputs of the respective multipliers, a first memory means storing the weighting signals coupled to the controller, a second memory means storing the weighting factors coupled to the controller, the controller having an outputs coupled respectively to the first and second phase shifters.

15

7. A communication system comprising first and second transceivers, one of the first and second transceivers having a transmitting section for transmitting dual code spread spectrum signals, and the other of the first and second transceivers having a receiving section comprising antenna diversity means for receiving the signals propagated by said one of the first and second stations, the antenna diversity means comprising a plurality of branches and means for co-phasing the signals in all but one of the branches with the signal in the one of the branches, means for combining the co-phased signals, means for respectively correlating the combined signals with first and second PN spreading codes used for spreading data streams in said transmitting section and means for recovering data from the correlated signals.

20

25

8. A system as claimed in claim 7, characterised in that means are coupled to the output of the signal combining means for splitting the combined

30

signal into two in-phase channels, each of the channels including means for frequency down-converting the signals in its channel and the correlating means for despreading the frequency down converted signals using a respective one of the first and second PN spreading codes, and in that the
5 means for recovering data comprise means coupled to the correlating means in each channel for comparing the despread signals to determine the data output.

9. A receiver of receiving a dual code spread spectrum signal,
10 constructed and arranged to operate substantially as hereinbefore described with reference to and as shown in the accompanying drawings.

10. A communications system constructed and arranged to operate
substantially as hereinbefore described with reference to and as shown in the
15 accompanying drawings.

ABSTRACT

**COMMUNICATION SYSTEM AND A RECEIVER
FOR USE IN THE SYSTEM**

5

A communication system comprises a wireless local area network (LAN) formed by a plurality of spacially separated transceivers (TR, TR'). Each of the transceivers has a transmitting section (10) for transmitting data by a combination of dual code spread spectrum techniques and a receiving section (12) for recovering the data. The receiving comprises a plurality of diversity antennas (ANT 1 to ANTn), an adaptive forward equal gain combiner (60) having a plurality of branches (62 to 74 and 62' to 74'), each branch being coupled to a respective one of said diversity antennas, an in-phase splitter (92) for splitting an output from the combiner into two output channels, means (94 to 98) for demodulating the signals in the output channels, means (104 to 108) for correlating the signals in each of the output channels with respective ones of the dual spreading codes and means (110) for recovering data from the correlated signals.

20

(Figure 3)

This Page Blank (uspto)

1/4

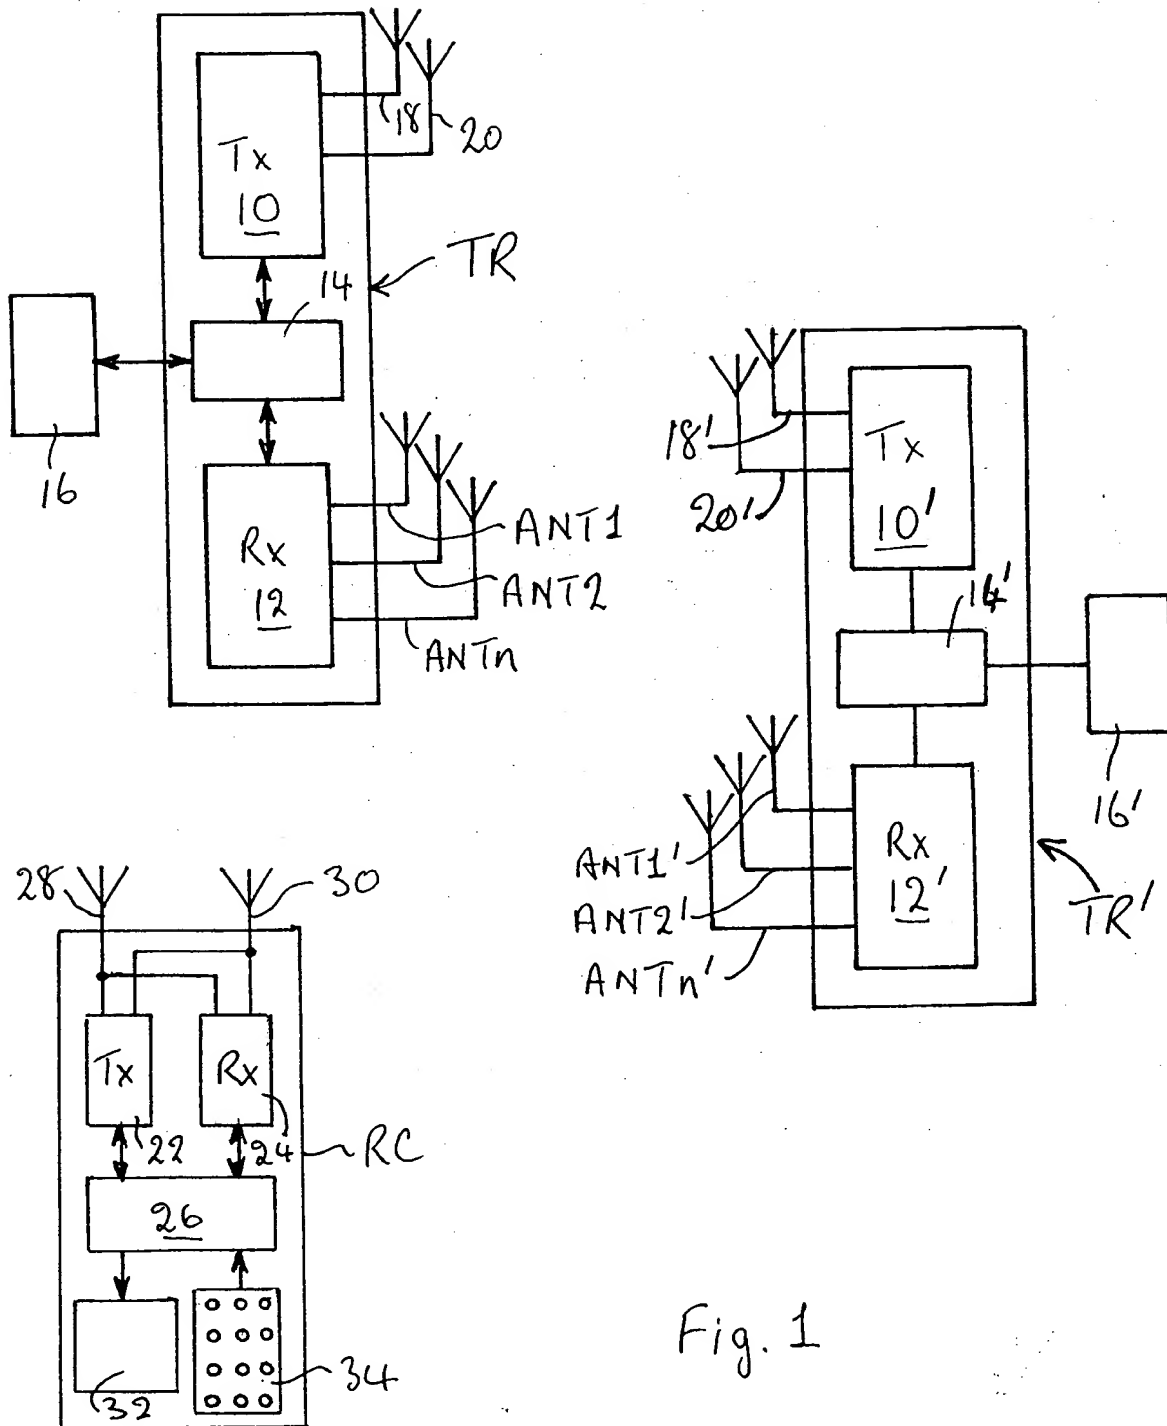


Fig. 1

This Page Blank (uspto)

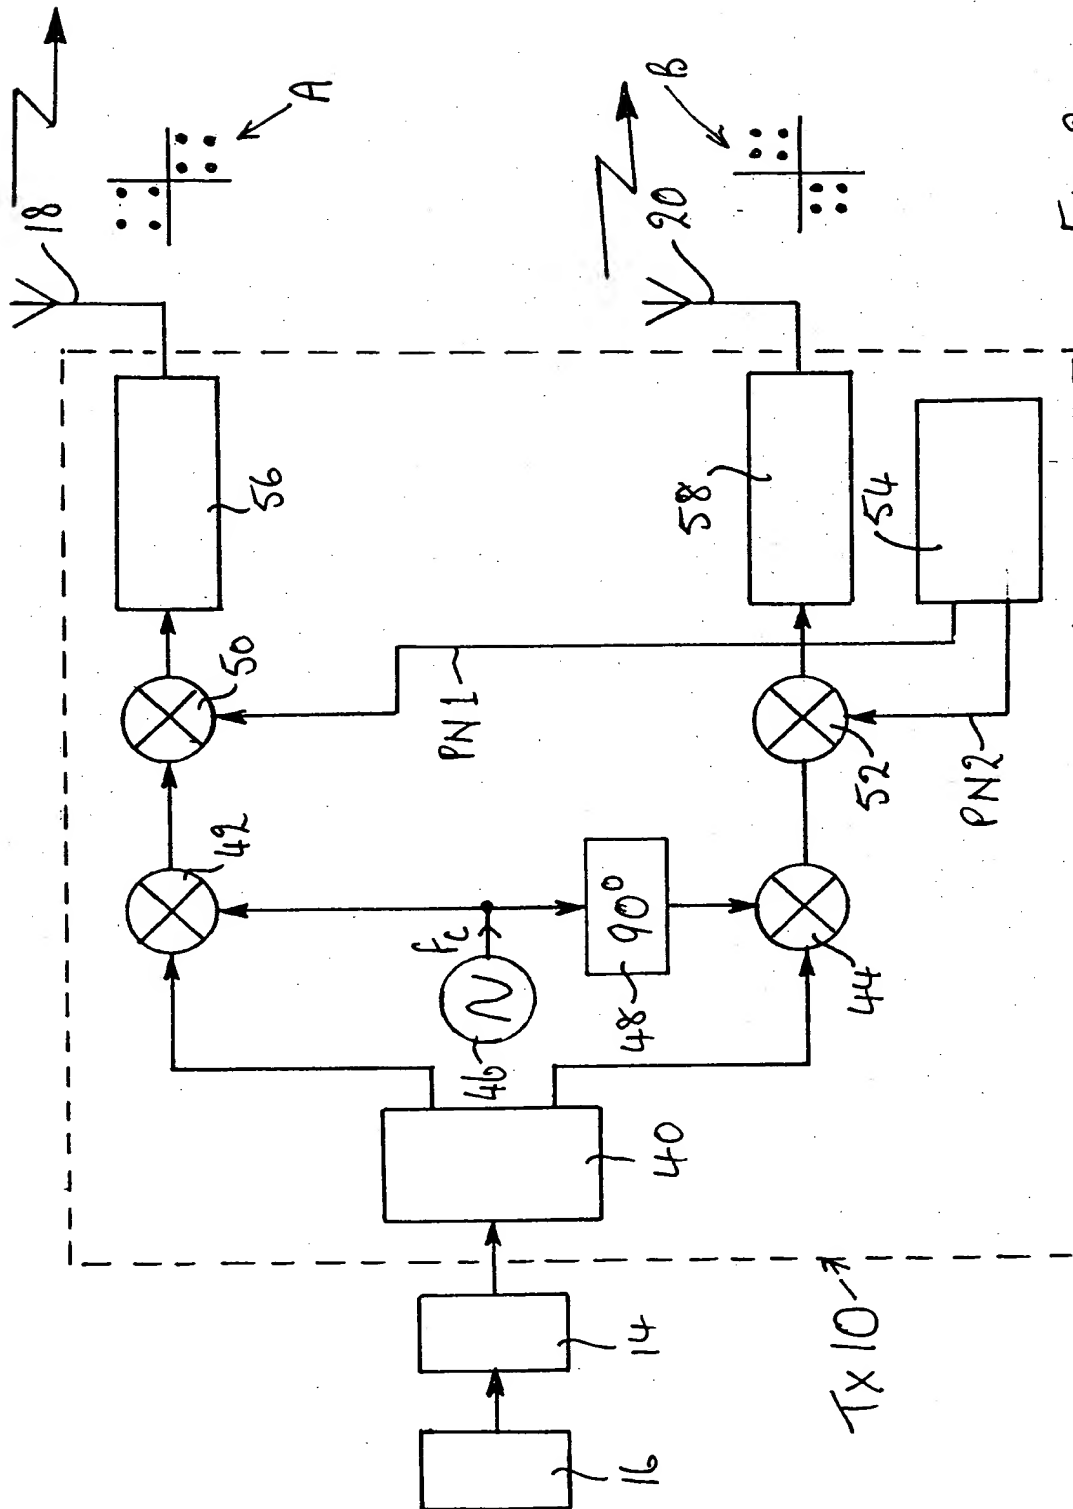


Fig. 2.

This Page Blank (uspto)

3/4


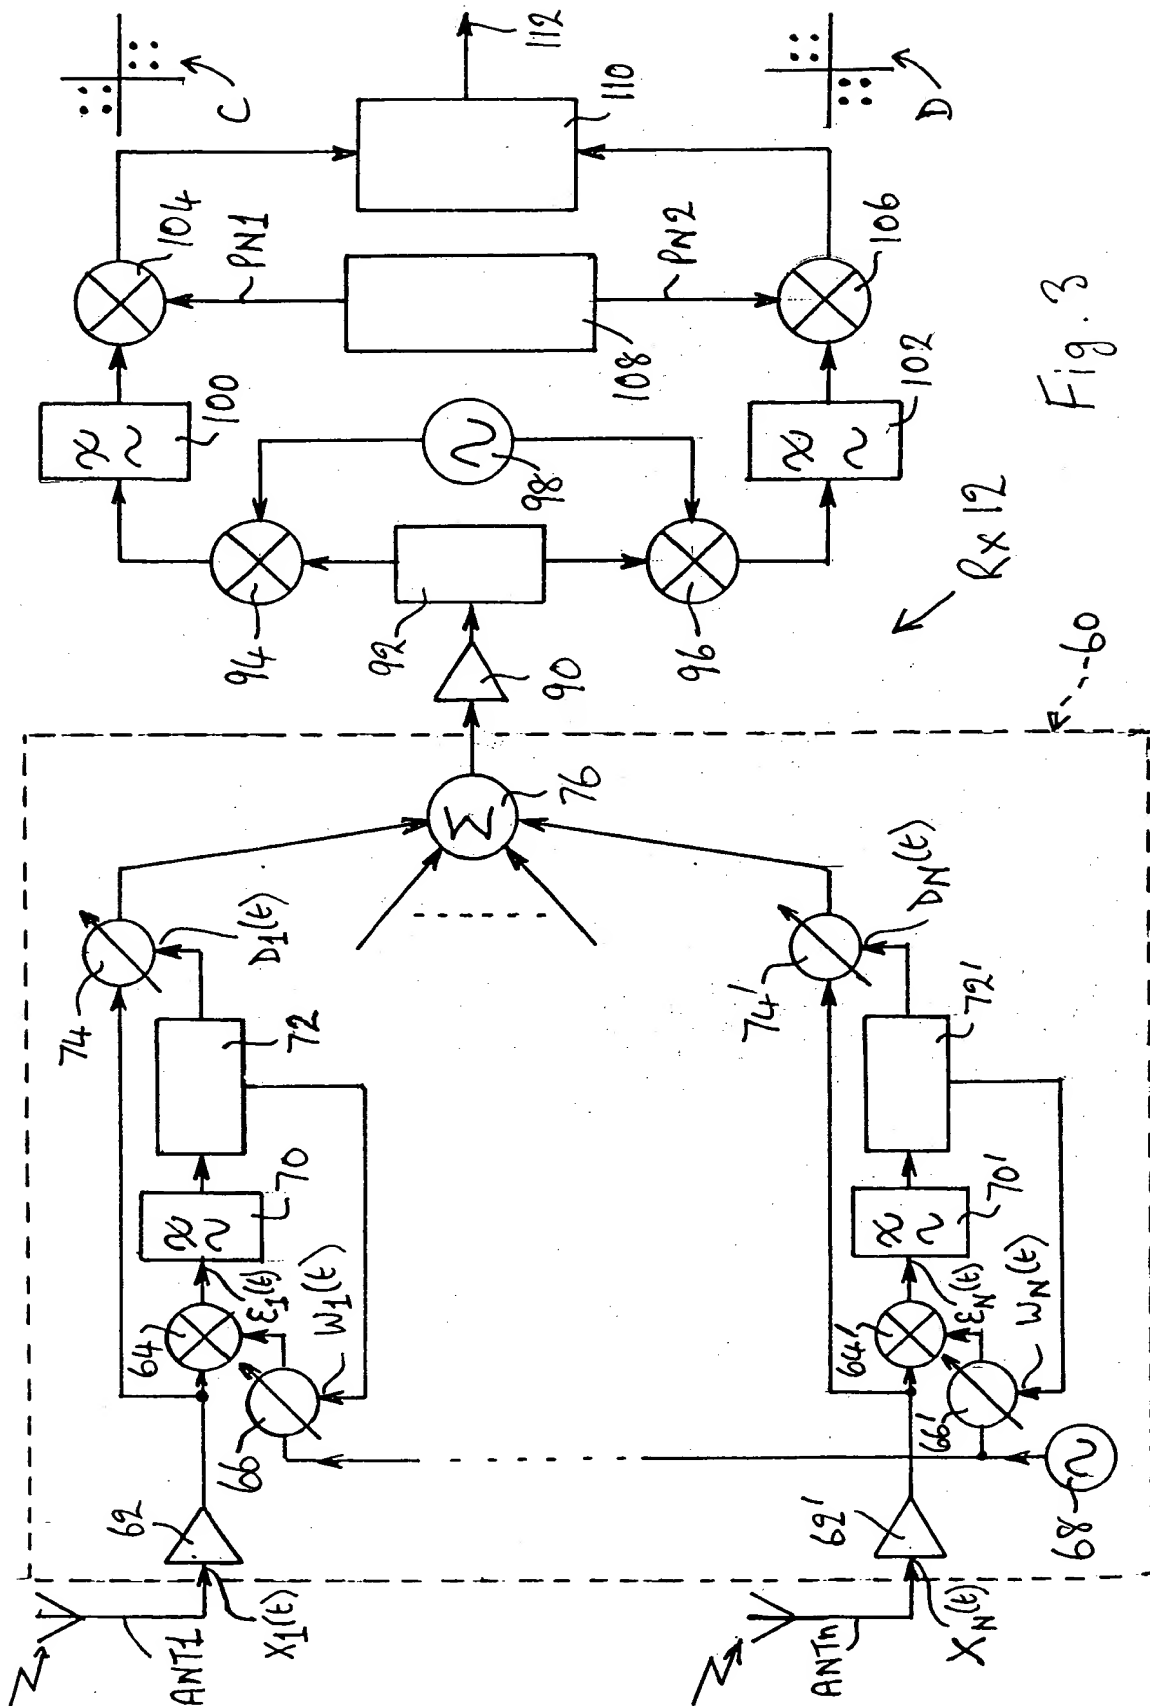


Fig. 3

This Page Blank (uspto)



Duplex

Creation date: 11-05-2004
Indexing Officer: TROBINSON - TERRI ROBINSON
Team: OIPEBackFileIndexing
Dossier: 09753931

Legal Date: 01-03-2001

No.	Doccode	Number of pages
1	FRPR	24

Total number of pages: 24

Remarks:

Order of re-scan issued on

